

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/SE05/000108

International filing date: 28 January 2005 (28.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: SE  
Number: 0400163-2  
Filing date: 28 January 2004 (28.01.2004)

Date of receipt at the International Bureau: 08 March 2005 (08.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm  
Applicant (s) SE

(21) Patentansökningsnummer 0400163-2  
Patent application number

(86) Ingivningsdatum 2004-01-28  
Date of filing

Stockholm, 2005-02-14

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Gunilla Larsson*  
Gunilla Larsson

Avgift  
Fee

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

## Method and system of radio communications

### TECHNICAL FIELD OF THE INVENTION

The present invention relates to communications. More especially it relates to packet data communications over radio links and change of base station. Particularly it relates to base station handover of packet switched communications in GPRS (General Packet Radio System) and UMTS (Universal Mobile Telecommunications System) communications.

### 10 BACKGROUND AND DESCRIPTION OF RELATED ART

Packet Radio Services offers packet switched communications over radio links in e.g. GPRS and UMTS. Data is disassembled and transmitted in packets or Protocol Data Units (PDUs). Upon reception, the PDUs are reassembled.

15 Figure 1 illustrates protocol layers for GERAN (GSM-EDGE Radio Access Network) A/Gb mode and will be explained in some detail below. All functions related to transfer of Network layer Protocol Data Units, N-PDUs, shall be carried out in a transparent way by the GPRS network entities.

20 3<sup>rd</sup> Generation Partnership Project (3GPP): *Technical Specification Group GERAN, Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Overall description of the GPRS radio interface; Stage 2 (Release 4), 3GPP TS 43.064 V4.3.0, France, February 2002,*  
25 provides the overall description for lower-layer functions of GPRS and EGPRS (Enhanced GPRS) radio interface, Um. In the sequel GPRS refers to both GPRS and EGPRS in not explicitly stated otherwise. An EGPRS mobile/base station is a GPRS compliant mobile/base station with additional capabilities for enhanced radio access protocol features and  
30

enhanced modulation and coding schemes. The support of EGPRS is optional for mobile station and network.

3<sup>rd</sup> Generation Partnership Project (3GPP): Technical Specification Group GSM/EDGE Radio Access Network; General Packet Radio Service (GPRS); Mobile Station (MS) - Base Station System (BSS) interface; Radio Link Control/Medium Access Control (RLC/MAC) protocol (Release 4); 3GPP TS 44.060 V4.8.0, France, September 2002, specifies the procedures used at the radio interface for the General Packet Radio Service, GPRS, Medium Access Control/Radio Link Control, MAC/RLC, layer. The RLC/MAC function supports two modes of operation:

- unacknowledged operation; and
- acknowledged operation.

Section 9.3 describes operation during RLC data block transfer. RLC acknowledged mode, RLC-AM, operation uses retransmission of RLC data blocks to achieve high reliability. RLC unacknowledged mode, RLC-UM, operation does not utilize retransmission of RLC data blocks.

3<sup>rd</sup> Generation Partnership Project (3GPP): Technical Specification Group Radio Access Network, Physical Layer Procedures, 3G TS 25.322 v3.5.0, France, December 2000, specifies three data transfer services of radio link control, RLC:

- transparent data transfer service,
- unacknowledged data transfer service, and
- acknowledged data transfer Service

Subsections 4.2.1.1 and 4.2.1.2 describe transparent mode entities and unacknowledged mode entities. One difference of the two modes resides in management of packet overhead.

In transparent mode no overhead is added or removed by RLC. In subsection 4.2.1.3 an acknowledged mode entity, AM-entity, is described (see figure 4.4 of the 3GPP Technical Specification). In acknowledged mode automatic repeat request, ARQ, is used. The RLC sub-layer provides ARQ functionality closely coupled with the radio transmission technique used.

3<sup>rd</sup> Generation Partnership Project (3GPP): Technical Specification Group Core Network; Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) - Serving GPRS Support Node (SGSN); Subnetwork Dependent Convergence Protocol (SNDCP) (Release 5), 3G TS 44.065 v5.1.0, France, September 2003, provides a description of the Subnetwork Dependent Convergence Protocol, SNDCP, for GPRS. SNDCP entity performs multiplexing of data coming from different sources to be sent using service provided by the LLC (Logical Link Control) layer,

3<sup>rd</sup> Generation Partnership Project (3GPP): Technical Specification Group Core Network; General Packet Radio Service (GPRS); GPRS Tunnelling Protocol (GTP) across the Gn and Gp interface (Release 5), 3GPP TS 29.060 V5.8.0, France, December 2003, defines the second version of GTP used on:

- the Gn and Gp interfaces of the GPRS;

- the Iu, Gn and Gp interfaces of the UMTS.

25 Within GPRS (and UMTS) Gn interface is an interface between GPRS Support Nodes (GSNs) within a PLMN and Gp interface is an interface between GPRS Support Nodes (GSNs) of different PLMNs. In UMTS Iu interface is an interface between RNC and Core Network.

30 A Gb interface is an interface between an SGSN (Serving GPRS Support Node) and a BSC (Base Station Controller). An

A interface is an interface between BSC and MSC (Mobile Services Switching Center).

GPRS Tunneling Protocol, GTP, is the protocol between GPRS Support Nodes, GSNs, in the UMTS/GPRS backbone network.

- 5 GTP allows multi-protocol packets to be tunneled through the UMTS/GPRS Backbone between GSNs and between SGSN (Serving GSN) and UTRAN (Universal Terrestrial Radio Access Network).

- 3<sup>rd</sup> Generation Partnership Project (3GPP): Technical Specification Group Core Network; Mobile Station - Serving GPRS Support Node (MS-SGSN); Logical Link Control (LLC) layer specification; (Release 4), 3GPP TS 44.064 V4.3.0, France, March 2002, defines the Logical Link Control, LLC, layer protocol to be used for packet data transfer between the  
10 Mobile Station, MS, and Serving GPRS Support Node, SGSN. LLC spans from the MS to the SGSN. LLC is intended for use with both acknowledged and unacknowledged data transfer.  
15

LLC supports two modes of operation:

- 20 - Unacknowledged peer-to-peer operation, LLC-UM, and
- Acknowledged peer-to-peer operation, LLC-AM.

- In unacknowledged operation logical link entity may initiate transmissions to a peer entity without prior establishment of a logical connection with the peer entity. LLC does  
25 not guarantee in-order delivery. LLC can detect errors in a received frame, and, depending on whether the frame is sent in protected mode or not, either discard or deliver the erroneous frame. No error recovery procedures are defined at the LLC layer. Higher-layer protocols can be used  
30 to provide reliability, if needed. This mode of operation is known as Asynchronous Disconnected Mode, ADM.

With acknowledged operation a balanced data link involves two participating entities, and each entity assumes responsibility for the organization of its data flow and for error recovery procedures associated with the transmissions that it originates. Each entity operates as both a data source and data sink in a balanced link, allowing information to flow in both directions. This mode of operation is known as Asynchronous Balanced Mode, ABM, and provides a reliable service with in-order delivery.

10 European Patent Application EP1318691 describes a method for informing the SGSN about a mobile station cell-change operation in the GPRS.

International Patent Application WO03032672 discloses a method of optimization of handover procedures in GPRS comprising the old SGSN sending identification response directly to the new SGSN.

International Patent Application WO0079808 claims a method of reducing delay time for a mobile station being handed over from an old SGSN to a new SGSN during a call handling a real-time payload in a GPRS packet switched radio telecommunications network comprising shortening the inter-SGSN Routing Area Update interruption interval and implementing low latency requirements and shaping of packet traffic.

International Patent Application WO02085048 describes a handover procedure for use in a GPRS network, reducing the need for re-sequencing in SGSN. Old SGSN sends a message to GGSN(Gateway GSN) requesting data transmission to stop. Data at old SGSN, for transmission to MS, is transferred to new SGSN and transmission from GGSN is resumed when handover is complete. GGSN then transmits data to new SGSN.

In U.S. Patent Application US20010019544 the GGSN and SGSN are allowed to finish up on-going transactions before moving the context to the new SGSN. The first (old) SGSN is operating as a temporary anchor in response to an inter-SGSN routing area update.

European Patent Application EP1345463 reveals buffering of TCP packets in a mobile node during handover.

Figure 2 illustrates schematically some network elements involved in packet switched handover. A source SGSN «source SGSN» connected to a gateway GSN «GGSN» supports data traffic to a mobile station «MS» via a source base station subsystem «source BSS». A base station change may be initiated, e.g. as the mobile station moves, towards a base station of a target base station subsystem «target BSS» supported by a target SGSN «target SGSN».

In prior art lossy type of packet switched handover is used for services requiring short delay but allowing some data loss at cell change, e.g. speech services. For lossy handover downlink data is typically duplicated by the source SGSN and sent both to the source BSS for further transmission to the mobile station in the current cell, and to the target SGSN «target SGSN».

The target side (BSS/SGSN) can either discard the forwarded data until the MS has indicated its presence in the target cell or, blindly, send the data without information available on whether or not the MS is present in the target cell. In case of blindly sending the data, the mobile station has been ordered to perform the handover and has synchronized towards the target cell, the downlink data flow is already ongoing and the mobile station can immediately start the uplink data flow. No acknowledgement of received data is required, neither in uplink nor in downlink.



According to prior art solutions, data losses will occur, e.g., when data packets sent to source BSS from source SGSN, are discarded in source BSS when a mobile station is handed over from source BSS to target BSS. Losses will also occur  
 5 if e.g. packet data forwarded to MS via the target SGSN and target BSS experiences a delay that is less than the delay associated with the MS processing the handover command and acquiring synchronization.

Lossless type of packet switched handover, PS handover, is  
 10 used for services that are sensitive to data losses but can accept a certain delay. The typical characteristics of a lossless handover are currently based on acknowledged RLC and LLC protocols and the SNDCP protocol operating in acknowledged mode. During the PS handover the downlink data  
 15 flow is forwarded from the source SGSN to the target SGSN. The target SGSN buffers the downlink data until the mobile station has indicated its presence in the target cell. The SNDCP layer at both the MS and SGSN assigns N-PDU Send number to each N-PDU sent and maintains N-PDU Receive number  
 20 for each received N-PDU for any given bi-directional packet service. When a handover is performed of such a service the number of the next expected uplink and downlink N-PDU is exchanged between the MS and the SGSN in handover signaling messages allowing precise knowledge of where packet  
 25 data transmission should resume after handover.

None of the cited documents above discloses lossless packet switched base station handover or radio cell change in LLC unacknowledged mode, LLC-UM.

#### SUMMARY OF THE INVENTION

30 Packet switched base station handover according to the invention is associated with cell change both within GERAN and between GERAN and UTRAN. According to the invention

the cell reselection time can be reduced. Also, due to the invention allowing operating, particularly LLC, in unacknowledged mode, link delay can be reduced during an entire data transfer session. This is particularly the case for  
5 base station handover in RLC-UM and LLC-UM.

Handover for which data losses may occur is known as lossy handover. For packet data communications with strict delay requirements lossless handover according to prior art is not always feasible due to its imposed additional delay  
10 caused by acknowledgements and retransmissions. The delay introduced by particularly LLC protocol layer in acknowledged mode affects higher layer operations, e.g. TCP based services with a resulting throughput deterioration due to TCP congestion control erroneously interpreting the addi-  
15 tional delay as channel congestion. Presently the only packet switched handover solution offered for delay sensitive applications, when LLC-AM is excluded, is lossy handover. Lossless packet switched handover can, according to prior art, only be achieved by operating LLC/SNDCP in  
20 acknowledged mode, which will increase overhead, add delay and reduce overall throughput.

Consequently, there is a need of reducing data transfer delay and control signaling, without risking packet losses due to packet switched handover.

25 It is consequently an object of the present invention to reduce data transfer delay without packet losses due to handover.

A further object is to reduce packet switched data transfer overhead without packet losses due to handover.

It is also an object not to require LLC-AM as a means for reducing the risk of data losses at packet switched handover.

5 Another object is to circumvent throughput reduction due to handover.

Finally, it is an object of the present invention to enhance LLC/SNDCP protocols to provide lossless handover with LLC/SNDCP operating in unacknowledged mode.

10 These objects are met by a method and system of lossless base station handover for packet switched communications not requiring LLC/SNDCP to operate in acknowledged mode during the complete data transfer session.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 illustrates protocol layers for GERAN (GSM-EDGE Radio Access Network) A/Gb mode, according to prior art.

Figure 2 illustrates schematically some network elements involved in packet switched handover.

20 Figure 3 illustrates an outline of a signaling diagram associated with an example PS handover according to a mode of the invention.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

25 To handle handover of packet services that require a minimum of packet loss it is currently possible to operate both the RLC and the LLC/SNDCP protocols in acknowledged mode. However this is not desirable as with these two protocols operating in acknowledged mode a certain amount of delay will be introduced whenever retransmission is determined to be necessary at any of these layers. The delay introduced especially when retransmission occurs at the LLC layer may

impact higher layer operation, e.g. for TCP based services where a protocol stack consisting of TCP/IP/SNDCP/LLC/RLC is used, with the net result being a major reduction in throughput temporarily being experienced by the affected packet service. This extra delay will impose a lowered quality of service as perceived by the user. In addition, operating these two protocols in acknowledged mode will result in increased overhead used for control plane functions, and therefore renders less bandwidth available to user plane payload.

Today's streaming services are normally implemented operating RLC in acknowledged mode and LLC/SNDCP in unacknowledged mode, which allows for eliminating the potential for serious delay problems as described above. However, this approach has the problem of not being able to support lossless packet service for the case where MS mobility involves a change of radio cell/base station and SGSN.

Packet switched base station handover according to the invention is associated with radio cell change both within GERAN and between GERAN and UTRAN.

To minimize potential delay and extra overhead as would result if operating the LLC/SNDCP protocols in acknowledged mode, for all packet flows subject to lossless packet-switched handover, PS handover, and to be compliant with the principles used for lossless data transfer in UTRAN, the following embodiments are identified:

- new mode of operation for SNDCP
- management of downlink Status with/without Source BSS assistance, and
- management of uplink status with/without source BSS assistance.

They are preferably combined. The packet loss during hand-over is minimized without requiring LLC/SNDCP protocols to operate in acknowledged mode during an entire data transfer session. Thereby higher user data rates are achieved during the entire data transfer session.

#### **New Mode of Operation for SNDCP**

The SNDCP protocol is modified to support a new mode of operation where it operates with both N-PDU Send and Receive Sequence numbers combined with the LLC protocol operating in unacknowledged mode. This means that the SNDCP protocol entities in the mobile station and in the network shall each maintain a Send and a Receive N-PDU Sequence number and also GTP T-PDU uplink and downlink sequence numbers for each packet flow subject to lossless PS handover. This sequence number information is forwarded from the source SGSN to the target SGSN so that a SNDCP engine started in the target SGSN can maintain sequence number continuity with the SNDCP engine used in the source SGSN. The downlink N-PDU sequence number and the downlink GTP T-PDU numbers are provided along with each N-PDU forwarded from the source SGSN to the target SGSN.

#### **Management of Downlink Status With Source BSS Assistance**

The downlink LLC data buffered in the source BSS that has not yet been sent to or acknowledged by the mobile station (at the RLC layer) at the point of time when the source BSS sends the PS handover command message to the MS can be deleted and a status message sent back to the source SGSN telling it how many LLC PDUs were deleted for each packet flow subject to lossless PS handover.

Alternatively, the status message sent from the source BSS to the source SGSN could provide parts of the deleted LLC

PDUs, e.g. the LLC header, or even the complete LLC PDUs. This means that SN-UNITDATA PDUs previously sent down to LLC at the source SGSN and relayed to the source BSS as segmented LLC PDUs will either be explicitly returned to the source SGSN or referenced in such a way to allow the source SGSN to determine which N-PDUs have not been sent to the MS, i.e. which whole N-PDUs have been acknowledged by the MS on RLC layer.

The Send N-PDU sequence numbers determined by the source SGSN are then forwarded in a message to the target SGSN. Upon MS arrival in the target cell the target SGSN can start transmitting the next downlink N-PDU expected by the MS for each packet flow subject to lossless PS handover. The MS can detect duplications of downlink N-PDUs since the sequence number used at the target SGSN is based on the sequence number used by source SGSN and it is included in the header of each N-PDU sent from the target SGSN.

For this embodiment it is required that the source SGSN supports N-PDU buffering if downlink N-PDUs are to be forwarded to the target SGSN in their correct order or the source BSS sends a status message that does not contain complete LLC PDUs. If the target SGSN can accept N-PDUs that are out of order and the status message sent by the source BSS contains complete LLC PDUs then the source SGSN need not support N-PDU buffering.

#### Management of Downlink Status Without Source BSS Assistance

In this embodiment the source SGSN can only estimate the Send N-PDU sequence numbers based on the delay attribute (with sufficient margin added) associated with each packet flow subject to lossless PS handover and forward these estimates to the target SGSN.

Source BSS buffers has downlink LLC data not yet sent to or acknowledged by the mobile station (at the RLC layer) at the point of time when the source BSS sends the PS handover command message to the MS. The source BSS sends the PS  
5 handover command message to the MS. Thereafter it sends a status message back to the source SGSN only indicating that the MS has been sent a PS handover command message (i.e. no downlink status is included in the message).

If upon arrival in the target cell, the MS does not send  
10 the network a message that provides downlink sequence number status for all packet flows subject to lossless PS handover, the target SGSN has no choice but to use the estimated Send N-PDU sequence numbers provided by the source SGSN. This may result in the target SGSN sending multiple  
15 downlink N-PDUs already received by the MS. However, the MS can once again detect duplications of downlink N-PDUs since the sequence number is included in the header of each SN-UNITDATA PDU used to transit each N-PDU.

If upon arrival in the target cell, the MS sends the net-  
20 work a message that provides downlink sequence number status for all packet flows subject to lossless PS handover, the target SGSN will have exact knowledge as to which downlink N-PDU to begin sending for each packet flow. The target SGSN deletes all downlink N-PDUs forwarded from the  
25 source SGSN that are implicitly acknowledged by the downlink sequence number status provided by the MS upon arrival in the target cell.

The embodiment requires that the source SGSN supports N-PDU buffering since a minimum set of downlink N-PDUs sent down  
30 to the source BSS must be buffered for each packet flow subject to lossless PS handover. The quantity of N-PDUs

buffered for a given packet flow can be determined by, e.g., the delay attribute associated with that packet flow.

#### Management of Uplink Status With Source BSS Assistance

When the source BSS receives the PS handover command message from the source SGSN it will at a point of time stop acknowledging RLC packets in the uplink. When this occurs it will send a status message to the source SGSN indicating that no more uplink LLC PDUs will be forwarded to it. The source SGSN can then determine the Receive N-PDU sequence numbers for all uplink packet flows subject to lossless PS handover and include them in a message to the target SGSN. After notifying the source SGSN, the source BSS will send the PS handover command message to the MS.

The PS handover command message may contain an up to date RLC ACK/NACK report allowing the MS to determine which N-PDUs have been completely received by the network. The MS will start uplink transmission upon arrival in the target cell from the next uplink N-PDU that was not acknowledged by lower layers in the old cell. This N-PDU should always correspond to the next uplink N-PDU expected by the target SGSN for each packet flow subject to lossless PS handover.

Alternatively, the PS handover command message may not include an RLC ACK/NACK report or any other indication of uplink status that the MS could use to determine the Send N-PDU sequence number for the packet flows subject to lossless PS handover. The MS will therefore start uplink transmission upon arrival in the target cell from what is estimated next uplink N-PDU that was not acknowledged by lower layers in the old (source) cell. In this case the first N-PDU sent by the MS in the new cell may not correspond to the next uplink N-PDU expected by the target SGSN. However, since the N-PDU sequence number is included in the



header of each SN-UNITDATA PDU used to transmit each N-PDU the target SGSN will be able to remove any duplication.

For both alternatives the source BSS is considered to have provided assistance to the source SGSN in that a status message is sent. The message indicates that the source BSS has stopped acknowledging RLC packets in the uplink and that no more uplink LLC PDUs will be forwarded to it.

#### Management of Uplink Status Without Source BSS Assistance

The PS handover command message may be sent from the source SGSN to the source BSS and include the expected Receive N-PDU sequence Number that the MS should start transmission with in the target cell for each uplink packet flow subject to lossless handover. This sequence number information is provided by the source SGSN without conferring with the source BSS as to whether or not it has stopped acknowledging RLC data in the uplink. As such, additional uplink LLC PDUs may be acknowledged by the source BSS prior to the PS handover command message being sent to the MS and may therefore result in a conflict with the Send N-PDU sequence number as viewed by the MS. In this case the MS must always accept the uplink sequence number information provided in the PS handover command message over the uplink sequence number information derived from local RLC operation. This means that the MS must always buffer some uplink N-PDUs that have already been confirmed according to RLC. The quantity of these N-PDUs that need to be buffered is expected to be small.

According to the invention a sequence tracking mode, STM, is defined for SND CP. In STM, the SND CP entities in the SGSN and in the MS shall always keep track of the uplink and downlink N-PDU sequence numbers corresponding to SND CP in LLC-AM. Further, in STM uplink and downlink G-PDU se-

sequence numbers associated with uplink and downlink N-PDUs are recorded corresponding to SNDCP in LLC-AM. Also, in STM SNDCP entities in SGSN and in MS shall make use of SN-UNITDATA PDUs corresponding to SNDCP in LLC-UM and SNDCP shall maintain sequence number continuity when PS handover occurs across SGSN.

An additional case is where the PS handover command sent to the MS does not include any Receive N-PDU numbers for any of the uplink packet flows subject to lossless PS handover. In this case the MS will use its local knowledge of uplink status which may lead to a duplicated uplink N-PDU being sent by the MS in new (target) cell. Since this duplication will be deleted by the target SGSN, since N-PDU sequence number continuity is supported across SGSNs, it will not be a problem.

Figure 3 illustrates an outline of a signaling diagram associated with an example PS handover according to a mode of the invention. In the example LLC operates in unacknowledged mode LLC-UM, even if the invention is applicable also in acknowledged mode, LLC-AM.

The signaling of figure 3 is initiated by an MS having one or more ongoing packet flows subject to lossless PS handover when the source BSS determines that a PS handover is required «1». RLC is operating in acknowledged mode, LLC is operating in unacknowledged mode and SNDCP is operating in sequence tracking mode, STM. Thereby N-PDU sequence numbering is managed as if LLC were operating in acknowledged mode. Therefore SNDCP entities in MS and network has to manage two sequence parameters for each packet flow subject to lossless PS handover, the Send N-PDU and the Receive N-PDU sequence numbers.

In STM SNDCP shall use SN-UNITDATA PDUs as with LLC-UM. For each packet flow subject to lossless PS handover the source SGSN buffers a set of downlink N-PDUs that reflects the delay attribute associated with that packet flow. As a  
 5 non-exclusive example the N-PDUs received from the GGSN during the running latest 500 ms are buffered.

The source BSS sends a PS Handover Required message «2» to the source SGSN.

The source SGSN sends a Prepare PS Handover Request message  
 10 to the target SGSN «3».

The target SGSN sends a PS Handover Request message «4» to the target BSS. The target BSS pre-allocates radio resources, if available, to the requested flows and sends a PS Handover Request Acknowledge message «4'» back to the  
 15 target SGSN.

The target SGSN sends a Prepare PS Handover Response message to the source SGSN «5». This message indicates that the SGSN is now ready to receive downlink data forwarded from the source SGSN. When source SGSN receives the Prepare PS Handover Response message «5» it  
 20

- stops sending downlink data to the source BSS,
- sends the PS Handover Command message «6» to the source BSS containing among other things the N-PDU Receive Sequence number of the next  
 25 expected uplink N-PDU to be received for each packet flow subject to lossless PS handover,
- starts forwarding to the target SGSN all buffered downlink N-PDUs received from the GGSN prior to the arrival of the Prepare PS Handover Response message from the target SGSN, and  
 30

- starts forwarding to the target SGSN downlink N-PDUs received from the GGSN after the arrival of the Prepare PS Handover Response message from the target SGSN «9».

5 Each downlink N-PDU forwarded to the target SGSN «9» contains an associated Send N-PDU sequence number and a GTP sequence number. The target SGSN starts buffering of the forwarded downlink N-PDUs until the MS indicates its presence «7» in the target cell by sending a PS Handover Complete message to the target SGSN «7», «10».

10

When the source BSS receives the PS Handover Command «6» it

- immediately stops reception and acknowledgement of data in the uplink;
  - stops transmission of downlink data towards the MS but may terminate transmission at an LLC PDU boundary without waiting for an acknowledgement;
  - sends a Forward BSS Context message to the source SGSN, the message not including information on which buffered downlink LLC-PDUs has been discarded;
  - sends a PS Handover Command «7» to the MS ordering the MS to a new target cell; the message including Receive N-PDU (uplink) sequence number of the next expected N-PDU to be received as viewed by the source SGSN for each packet flow subject to lossless PS handover;
- 15
- 20
- 25

When the MS has reconfigured itself and acquired synchronization in the new cell, it sends a PS Handover Complete message to the target BSS «7». This message includes the sequence number of the next expected downlink N-PDU to be

30

received (as viewed by MS) for each downlink packet flow subject to lossless PS handover.

5 The source BSS then sends a Forward BSS Context message «8» to the source SGSN indicating that the BSS has ordered the MS to the new cell. The message comprises no send buffer status information that the source SGSN could make use of for determining the precise status of transmitted downlink N-PDUs before starting forwarding data to the target SGSN.

10 Upon receiving the Forward BSS Context message «8», the source SGSN determines the following values for each packet flow subject to lossless PS handover and forwards this information to the target SGSN in the Forward SRNS Context message «9»:

- 15 - Downlink N-PDU Send sequence number for the next downlink N-PDU to be sent to the MS,
- Downlink GTP-U sequence number for the next downlink GTP-U T-PDU to be relayed to the target SGSN,
- 20 - Uplink N-PDU Receive sequence number for the next uplink N-PDU to be received from the MS, and
- Uplink GTP-U sequence number for the next uplink GTP-U T-PDU to be sent from the target SGSN to the GGSN.

25 Prior to receiving the Prepare PS Handover Response message «5» the source SGSN was buffering downlink N-PDUs according to the delay attributes of the packet flows subject to lossless PS handover. Since the Forward BSS Context message «8» received from the source BSS does not include  
30 downlink status information, the source SGSN selects values for the two downlink sequence numbers listed above that re-

flect the oldest buffered downlink N-PDU for each of the packet flows subject to lossless PS handover. I.e. a worst case scenario is anticipated and corresponding values selected.

- 5 Upon receiving the Forward SRNS Context message, the target SGSN sends a Forward SRNS Context Acknowledge message «9'» back to the source SGSN.

Thereafter the target BSS sends a PS Handover Complete message «10» to target SGSN. The PS Handover Complete message  
10 «10» includes the sequence number of the next expected downlink N-PDU to be received (as viewed by MS) for each packet flow subject to lossless PS handover.

The target SGSN can now start sending the buffered downlink data starting with the next downlink N-PDU expected by the  
15 MS for each packet flow subject to lossless PS handover. The downlink sequence number status information provided in the PS Handover Complete message «12» allows the target SGSN to:

- delete all downlink N-PDUs forwarded from the  
20 source SGSN that are implicitly acknowledged by the downlink sequence number status information, and
- ignore downlink sequence number status information provided by the source SGSN in the Forward  
25 SRNS Context message «9».

The target SGSN sends a PS Handover Complete message «12» to the source SGSN, which acknowledges the completion of the handover procedure by responding with a PS Handover Complete Acknowledge message «12'» back to target SGSN.  
30 Target SGSN sends an Update PDP Context Request to the GGSN «13». The GGSN updates its PDP context fields and return

an Update PDP Context Response message «13'». SGSN initiates Packet Flow Procedures to release resources in the source BSS «14». Finally, MS and target SGSN perform routing area update procedure «15».

5 The example signaling described above in relation to figure 3 illustrates a method and system where source SGSN provides the MS with the sequence number of the next expected uplink N-PDU to be received in the PS Handover Command «6», «7». (Management of uplink status is provided without in-  
10 formation processing of source BSS.)

MS preferably provides the network with the sequence number of the next expected downlink N-PDU to be received in the PS Handover Complete message «7'», «10». (Management of  
15 downlink status is provided without information processing of source BSS).

SNDCP entities in the source SGSN preferably support some buffering of downlink N-PDUs. The source SGSN then buffers an amount of N-PDUs corresponding to the delay attribute of the associated packet flow. Upon completion of the PS  
20 handover preparation phase all such buffered N-PDUs can be forwarded to the target SGSN to ensure all forwarded N-PDUs arrive in correct order. Downlink N-PDUs received from the GGSN after PS handover preparation is completed will be sent to the target SGSN after the buffered downlink N-PDUs  
25 are forwarded. Upon MS arrival to the new cell, the target SGSN discovers the downlink status of the packet flows, e.g. via information provided in the PS Handover Complete message «10», begins transmitting the appropriate downlink N-PDU for each packet flow subject to lossless PS handover  
30 and deletes all implicitly confirmed downlink N-PDUs received from the source SGSN.

In SNDCP STM, SNDCP entities in the target SGSN will be required to support some buffering of downlink N-PDUs. This is necessary as lossless operation requires that the target SGSN be informed of the presence of the MS in the new cell before it can begin downlink transmission of packet data.

The source BSS also supports buffering which allows it the option of attempting to empty downlink buffers upon receiving a PS Handover Command «6» from the source SGSN.

In SNDCP STM, SNDCP entities in MS will be required to buffer the uplink N-PDUs beyond the point where their associated RLC/MAC entities acknowledges the complete transmission of any given LLC PDU. This is necessary for the example signaling where management of uplink status is provided without information processing of source BSS. This buffering allows source BSS the option of continued reception of uplink data when attempting to empty downlink buffers upon reception of a PS Handover Command «6» from the source SGSN.

The example described in relation to figure 3 is just an example. It illustrates, e.g., source SGSN and target SGSN as separate entities (inter SGSN PS handover). However, the invention also covers intra SGSN PS handover between base stations. Also, in figure 3 signaling for one single radio access technology, RAT, is illustrated. Though, the same principles are valid also for inter RAT PS handover, such as for PS handover between base stations of GERAN and UTRAN respectively.

Figure 4 illustrates a simplified block diagram of a mobile station according to the invention. The mobile station comprises processing means « $\mu_{MS}$ » operating according to one or more protocols for communicating protocol data units as described above. Receive means « $R_{MS}$ » receives information



from the communications network to which the mobile station is connected. The receive means are connected to the processing means  $\langle \mu_{MS} \rangle$  and receives, e.g., information from the communications network on next expected uplink protocol data unit at handover. Buffer means  $\langle B_{MS} \rangle$  buffers uplink protocol data units, N-PDUs, as described above.

Figure 5 displays schematically a block diagram of a support node, such as a Serving GPRS Support Node, SGSN, according to the invention. The support node comprises processing means  $\langle \mu_{SN} \rangle$  operating according to one or more protocols for communicating packet switched data as described above. Receive means  $\langle R_{SN} \rangle$  receives protocol data units from one or more respective mobile stations on next expected downlink protocol data unit, N-PDU. Transmit means  $\langle T_{SN} \rangle$  transmits protocol data units to the one or more mobile stations which are communicating packet switched data over the SGSN. Buffer means  $\langle B_{SN} \rangle$  buffers downlink N-PDUs.

Figure 6 depicts a schematic block diagram of a base station entity according to the invention. The base station entity comprises receive means  $\langle R_{BS} \rangle$ , transmit means  $\langle T_{BS} \rangle$  and buffer means  $\langle B_{BS} \rangle$ . The receive means  $\langle R_{BS} \rangle$  receiving one or more commands of base station change as decided by network to which the base station entity is connected. Also, receive means receives  $\langle R_{d,BS} \rangle$  that is not necessarily identical to receive means  $\langle R_{BS} \rangle$ , receives uplink data from one or more mobile stations communicating packet switched data via the base station entity. The transmit means  $\langle T_{BS} \rangle$  transmits protocol data units to one or more mobile stations communicating packet switched data via the base station entity.

Some exemplary features and characteristics of the invention are listed below.

1. A method of base station change, the base station transferring packet switched communications between a mobile station and a support node, the method characterized in that the base station change is of lossless type allowing lossless base station change of packet switched communications in unacknowledged mode between the mobile station and the support node.  
5
2. The method according to characteristic 1 characterized in that the base station change allows an entire data transfer session in unacknowledged mode.  
10
3. The method according to characteristic 1 characterized in that the packet switched communications in unacknowledged mode between the mobile station and the support node concerns unacknowledged mode of LLC protocol.  
15
4. The method according to characteristic 2 characterized in that the data transfer session is a session of data file transfer.
5. The method according to characteristic 1 comprising a mode of operation characterized by recording one or more sequence numbers of one or more protocol data units in both uplink and downlink.  
20
6. The method according to characteristic 5 characterized in that the protocol data units are N-PDUs.  
25
7. The method according to characteristic 5 characterized in that the protocol data units are G-PDUs.
8. The method according to characteristic 1 characterized in that SNDCP sequence continuity is maintained.  
30

tained across a support node involved in packet switched base station change.

9. The method according to characteristic 1 characterized in that one or more SN-UNITDATA protocol data unit includes one or more N-PDU.

10. The method according to characteristic 9 characterized in that N-PDU number is included in a header of SN-UNITDATA protocol data unit.

11. The method according to characteristic 1 characterized in that a support node connected to a source base station or base station subsystem to be changed informs a mobile station, also connected to the base station or base station subsystem, on a next expected uplink protocol data unit to be received.

12. The method according to characteristic 1 characterized in that a mobile station connected to a source base station or base station subsystem to be changed informs a source support node, also connected to the base station or base station subsystem, on a next expected downlink protocol data unit to be received.

13. The method according to characteristic 11 or 12 characterized in that the base station or base station subsystem relays the information between MS and SGSN with no required processing of the information.

14. The method according to any of characteristics 11-13 characterized in that the source base station or base station subsystem is allowed to continue receiving uplink data while emptying downlink buffers as a response to a PS Handover Command.

15. The method according to any of characteristics 1-14 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.
- 5 16. The method according to characteristic 15 characterized in that SNDCP entities in a source support node buffers one or more downlink N-PDUs.
- 10 17. The method according to characteristic 16 characterized in that the source support node buffers a number of N-PDUs corresponding to the delay attribute of the associated packet flow.
- 15 18. The method according to characteristic 17 characterized in that the buffered N-PDUs are forwarded to a target support node during the base station change.
19. The method according to characteristic 18 characterized in that the received forwarded N-PDUs in target support node are forwarded to the mobile station.
- 20 20. The method according to characteristic 19 characterized in that the one or more N-PDUs are forwarded to the mobile station when the support node has received a PS Handover Complete message.
- 25 21. The method according to characteristic 15 characterized in that one or more downlink N-PDUs are buffered in SNDCP entities in a target support node.
22. The method according to characteristic 21 characterized in that the target support node buffers a number of uplink N-PDUs corresponding to the number of N-PDUs received from the source SGSN.

23. The method according to characteristic 15 characterized in that one or more uplink N-PDUs are buffered in SNDCP entities in a mobile station.

5 24. The method according to characteristic 23 characterized in that the mobile station buffers a number of N-PDUs corresponding to the maximum delay of RLC/MAC acknowledgement of transmission of LLC PDU.

10 25. A mobile station for packet switched communications communicating over a communications network including base stations and one or more support nodes, the mobile station characterized by processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the  
15 link protocol data unit in association with packet switched base station change allowing lossless base station change of packet switched communications.

20 26. A mobile station for packet switched communications communicating over a communications network including base stations and one or more support nodes, the mobile station characterized by processing means operating according to one or more protocols transferring protocol data units and receiver receiving informing from the network on next expected uplink protocol data unit in association with packet switched base station change allowing  
25 lossless base station change of packet switched communications.

30 27. The mobile station according to characteristic 25 or 26 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.

28. The mobile station according to characteristic 27 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol N-PDU sequence numbers of N-PDUs received or  
5 transferred.
29. The mobile station according to characteristic 25 or 26 characterized by protocol data units including N-PDUs.
30. The mobile station according to any of characteristics  
10 27-29 characterized by buffer means, buffering uplink N-PDUs
31. The mobile station according to characteristic 30 characterized in that the buffer size is sufficiently large for a number of N-PDUs corresponding to  
15 the maximum delay of RLC/MAC acknowledgement of transmission of LLC PDU to be buffered.
32. The mobile station according to any of characteristics 25-29 characterized in that the information on next expected protocol data unit is transferred in a  
20 message initiating or completing a change of base station or handover as regards the mobile station.
33. The mobile station according to characteristic 32 characterized in that the message initiating or completing a change of base station or handover is a PS  
25 Handover Command or PS Handover Complete message.
34. A support node in a packet switched communications network comprising base stations for communications involving at least one mobile station, the support node  
30 characterized by processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the

support node to inform a mobile station of next expected uplink protocol data unit in association with packet switched base station change of the at least one mobile station.

- 5 35. A support node in a packet switched communications network comprising base stations for communications involving at least one mobile station, the support node characterized by processing means operating according to one or more protocols transferring protocol data units and receiver receiving informing from the at least one mobile station on next expected downlink protocol data unit in association with packet switched handover allowing lossless base station change of packet switched communications.
- 10 36. The support node according to characteristic 35 characterized in that the base station change is within GERAN or between GERAN and UTRAN
- 15 37. The support node according to characteristic 35 characterized in that a protocol entity of the support node maintains sequence continuity over the support node.
- 20 38. The support node according to characteristic 37 characterized in that the protocol entity operates according to SND CP.
- 25 39. The support node according to characteristic 35 characterized in that upon completion of a packet switched base station change, the support node sustaining the base station changed to starts transmissions of protocol data units to the at least one mobile station at the next protocol data unit expected by the at least one mobile station.
- 30

40. The support node according to characteristic 39 characterized by receive means, the transmissions being started upon the receive means receiving a PS Handover Complete message.

5 41. The support node according to any of characteristics 34-40 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.

10 42. The support node according to characteristic 41 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol N-PDU sequence numbers of N-PDUs received or transferred.

15 43. The support node according to characteristic 41 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol G-PDU sequence numbers of G-PDUs received or transferred.

20 44. The support node according to any of characteristics 41-43 characterized by buffer means, buffering downlink N-PDUs

25 45. The support node according to characteristic 44 characterized in that the buffer size is sufficiently large for a number of N-PDUs corresponding to a delay attribute of the associated packet flow.

30 46. The support node according to any of characteristics 34-45 characterized in that the information on next expected protocol data unit is transferred in a message initiating or completing a change of base station or handover as regards the at least one mobile station.



47. The support node according to characteristic 46 characterized in that the message initiating or completing a change of base station or handover is a PS Handover Command or PS Handover Complete message.

5 48. The support node according to characteristic 44 or 45 characterized in that the buffered protocol data units are transferred upon packet switched base station change to a support node sustaining packet switched communications over the base station to which the at least  
10 one mobile station changed.

49. The support node according to characteristic 48 characterized in that the buffered protocol data units are transferred upon completion of a preparation phase of the packet switched base station change.

15 50. The support node according to any of characteristics 34-49 characterized in that the support node is a Serving GPRS Support Node.

20 51. A base station entity in a packet switched communications network comprising at least one support node for communications involving at least one mobile station, the base station entity characterized by receive means, transmit means and buffer means, the buffer means buffering downlink protocol data units, the buffer means being emptied of protocol data units destined for the at  
25 least one mobile station, the protocol data units being transmitted by the transmit means upon the receive means receiving a command of packet switched base station change, as regards the one mobile station, from the at least one support node.

30 52. The base station according to characteristic 51 characterized by receive means and transmit

means, the receive means receiving uplink packet data from the at least one mobile station while the buffer means being emptied of protocol data units destined for the at least one mobile station.

5 53. A communications system characterized by means for carrying out the method in any of characteristics 1-24.

54. A communications system characterized by a plurality of mobile stations in any of characteristics 25-33, the mobile stations being capable of reciprocal  
10 packet switched communications.

55. A communications system characterized by a plurality of support nodes in any of characteristics 34-50.

15 56. A communications system characterized by a plurality of base station entities in characteristic 51 or 52.

A person skilled in the art readily understands that the properties of an SGSN, a GGSN, a BSS, a base station or an  
20 MS are general in nature. The use of concepts such as SGSN or MS within this patent application is not intended to limit the invention only to devices associated with these acronyms. It concerns all devices operating correspondingly, or being obvious to adapt thereto by a person  
25 skilled in the art, in relation to the invention. As an explicit non-exclusive example the invention relates to mobile equipment without a subscriber identity module, SIM, as well as mobile stations including one or more SIMs. Further, protocols and layers are referred to in close relation with GPRS, UMTS and Internet terminology. However,  
30 this does not exclude applicability of the invention in

other systems with other protocols and layers of similar functionality.

The invention is not intended to be limited only to the embodiments described in detail above. Changes and modifications may be made without departing from the invention. It covers all modifications within the scope of the following claims.

4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215

## CLAIMS

1. A method of base station change, the base station transferring packet switched communications between a mobile station and a support node, the method characterized in that the base station change is of lossless type allowing lossless base station change of packet switched communications in unacknowledged mode between the mobile station and the support node.  
5
2. The method according to claim 1 characterized in that the base station change allows an entire data transfer session in unacknowledged mode.  
10
3. The method according to claim 1 characterized in that the packet switched communications in unacknowledged mode between the mobile station and the support node concerns unacknowledged mode of LLC protocol.
- 15 4. The method according to claim 2 characterized in that the data transfer session is a session of data file transfer.
5. The method according to claim 1 comprising a mode of operation characterized by recording one or more sequence numbers of one or more protocol data units in both uplink and downlink.  
20
6. The method according to claim 5 characterized in that the protocol data units are N-PDUs.
7. The method according to claim 5 characterized in that the protocol data units are G-PDUs.  
25
8. The method according to claim 1 characterized in that SNDCP sequence continuity is maintained

across a support node involved in packet switched base station change.

9. The method according to claim 1 characterized in that one or more SN-UNITDATA protocol data unit includes one or more N-PDU.

10. The method according to claim 9 characterized in that N-PDU number is included in a header of SN-UNITDATA protocol data unit.

11. The method according to claim 1 characterized in that a support node connected to a source base station or base station subsystem to be changed informs a mobile station, also connected to the base station or base station subsystem, on a next expected uplink protocol data unit to be received.

12. The method according to claim 1 characterized in that a mobile station connected to a source base station or base station subsystem to be changed informs a source support node, also connected to the base station or base station subsystem, on a next expected downlink protocol data unit to be received.

13. A mobile station for packet switched communications communicating over a communications network including base stations and one or more support nodes, the mobile station characterized by processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the mobile station to inform the network of next expected downlink protocol data unit in association with packet switched base station change allowing lossless base station change of packet switched communications.

14. A mobile station for packet switched communications communicating over a communications network including base stations and one or more support nodes, the mobile station characterized by processing means operating according to one or more protocols transferring protocol data units and receiver receiving informing from the network on next expected uplink protocol data unit in association with packet switched base station change allowing lossless base station change of packet switched communications.

15. The mobile station according to claim 13 or 14 characterized in that the protocol data units are compliant with Sub-Network Dependent Convergence Protocol.

16. The mobile station according to claim 15 characterized by the processing means recording according to the Sub-Network Dependent Convergence Protocol N-PDU sequence numbers of N-PDUs received or transferred.

17. A support node in a packet switched communications network comprising base stations for communications involving at least one mobile station, the support node characterized by processing means operating according to one or more protocols receiving protocol data units, the processing means extracting information for the support node to inform a mobile station of next expected uplink protocol data unit in association with packet switched base station change of the at least one mobile station.

18. A support node in a packet switched communications network comprising base stations for communications involving at least one mobile station, the support node characterized by processing means operating

according to one or more protocols transferring protocol data units and receiver receiving informing from the at least one mobile station on next expected downlink protocol data unit in association with packet switched handover allowing lossless base station change of packet switched communications.

19. The support node according to claim 18 characterized in that a protocol entity of the support node maintains sequence continuity over the support node.

10 20. The support node according to claim 19 characterized in that the protocol entity operates according to SNDCCP.

21. A base station entity in a packet switched communications network comprising at least one support node for communications involving at least one mobile station, the base station entity characterized by receive means, transmit means and buffer means, the buffer means buffering downlink protocol data units, the buffer means being emptied of protocol data units destined for the at least one mobile station, the protocol data units being transmitted by the transmit means upon the receive means receiving a command of packet switched base station change, as regards the one mobile station, from the at least one support node.

25 22. The base station according to claim 21 characterized by receive means and transmit means, the receive means receiving uplink packet data from the at least one mobile station while the buffer means being emptied of protocol data units destined for the at least one mobile station.

30

23. A communications system characterized by means for carrying out the method in any of claims 1-12.




**ABSTRACT**

The present invention relates to communications. More especially it relates to packet data communications over radio links and change of base station. Particularly it relates to base station handover of packet switched communications in GPRS (General Packet Radio System) and UMTS (Universal Mobile Telecommunications System) communications.

Figure for publication with abstract: figure 2.


4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206

1/4

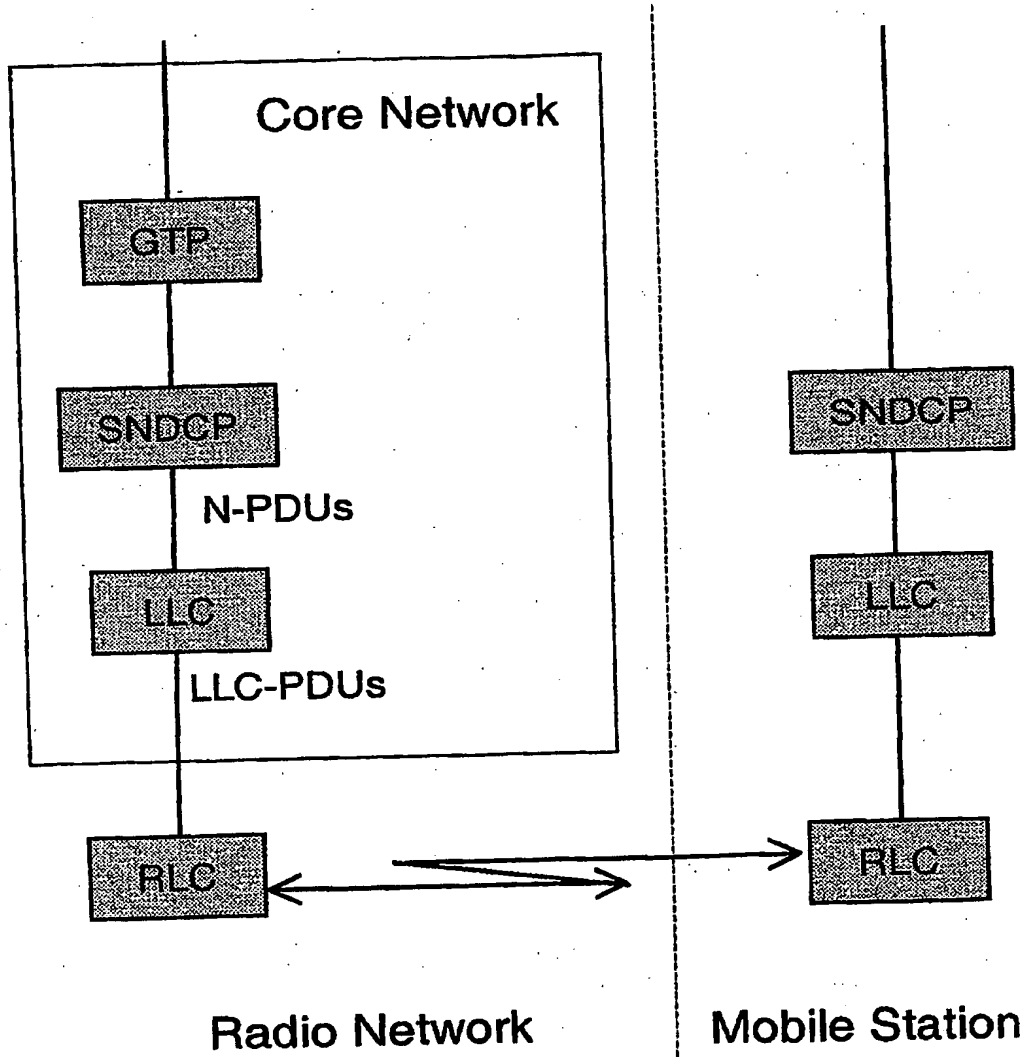

**Fig. 1**

2/4

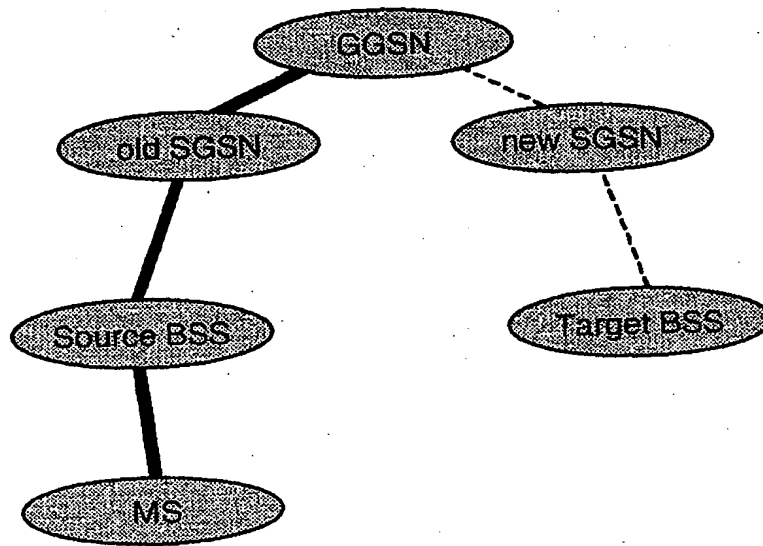

**Fig. 2**

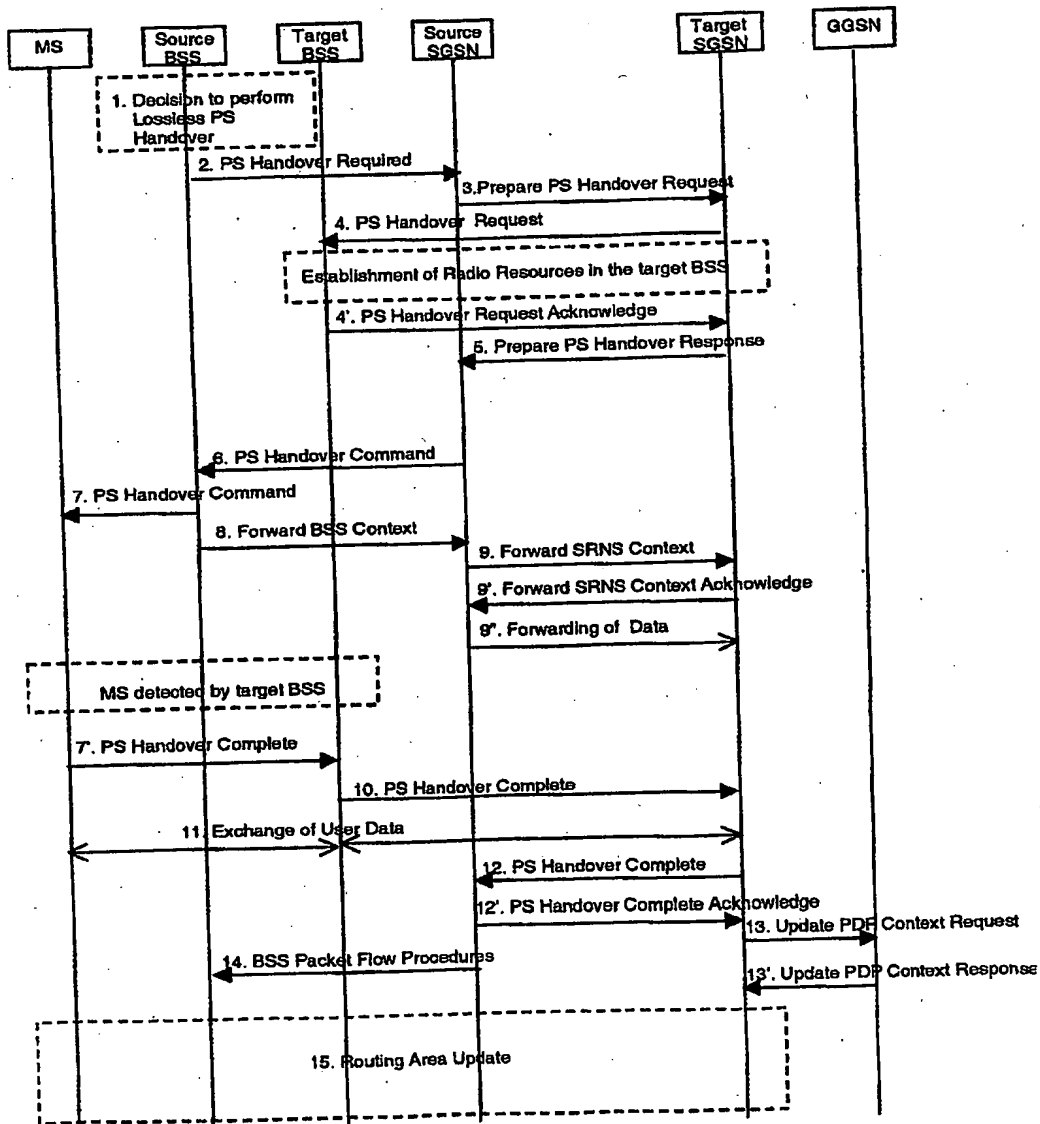


Fig. 3

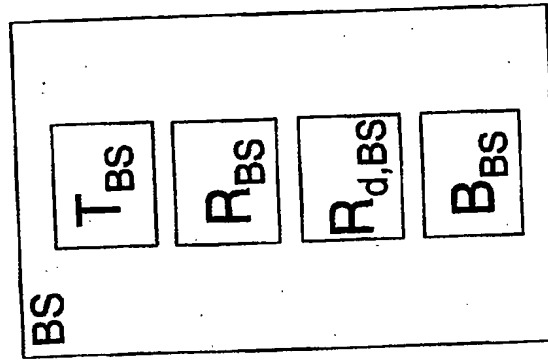


Fig. 6

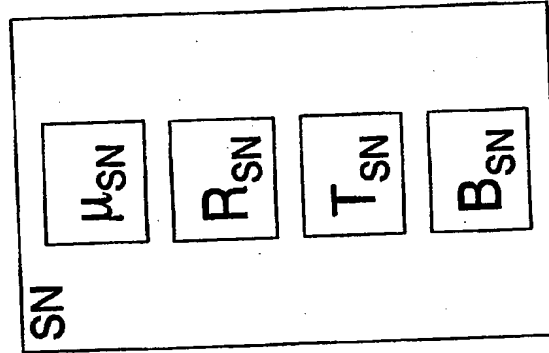


Fig. 5

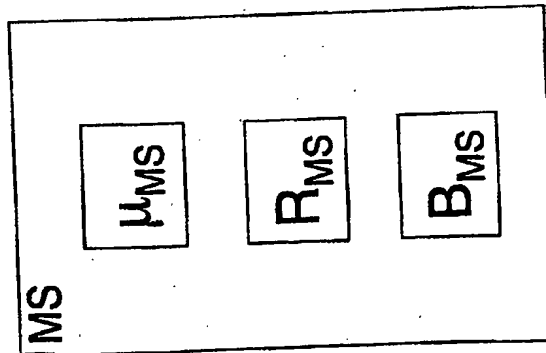


Fig. 4